

Sundance® Spas

Hot Tub Specification Handbook



Sundance® Splash Paisley™


Specifications

Seating Capacity.....	5 Adults
Dimensions	78" x 68" x 32" (198 cm x 173 cm x 81 cm);
Dry Weight.....	285 lbs (129 kg)
Filled Weight (Spa Volume)	3,120 lbs (1,415 kg)
Filled Weight (Average Fill).....	2,404 lbs (1,090 kg)
Water Capacity (Spa Volume)	340 US gallons (1,287 Liters)
Water Capacity (Average Fill)	254 US gallons (961 Liters)
Electronic Controls	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
Pump 1.....	North America (60 Hz): 2-Speed, 2.0 HPR continuous Export (50 Hz): 2-Speed, 1.5 HP
Pump 2.....	N/A Export (50 Hz): N/A
Circulation Pump.....	N/A
Total Jets	20
Seat A Jets	1 DirectionalMax1, 1 DirectionalMax2
Seat B Jets	2 DirectionalMax1
Seat C Jets	1 DirectionalMax2, 1 DirectionalMax2
Seat D Jets	2 DirectionalMax1, 2 DirectionalMax2, 2 DirectMiniMax
Seat E Jets	2 DirectionalMax1, 2 DirectionalMax2, 2 DirectMiniMax
Footwell (F) Jets	2 DirectionalMax1
Massage Selectors	N/A
Air Controls	2
Water Management System	One Easy Kleen 30 ft ² filter cartridge; Optional factory installed Ozone Export (50 Hz): Optional factory installed Ozone
LED Lighting	Multicolor Waterfall light; Footwell light, Exterior corner lights (8 qty)
Shell/Cabinet Colors	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
Headrests	2
Waterfalls	One with independent flow rate (on or off) adjustment; powered by pump 1
Heater:	Hi Flow 1.0kW/4kW Export (50 Hz): Hi Flow 3.0kW
Electrical Requirements:	North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A Export (50 Hz): 230-240V@1x16A, 1X32A
Warranty*	North America (60 Hz): 5 Years Shell, 5 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 1 Year Lights; Export (50 Hz): 5 Years Shell, 5 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 2 Years Cabinet, 2 Years Jets, 2 Years Lights;
Special Features	Optional Suite Package Add-On



Sundance Splash Paisley

Operation/Seat Depths

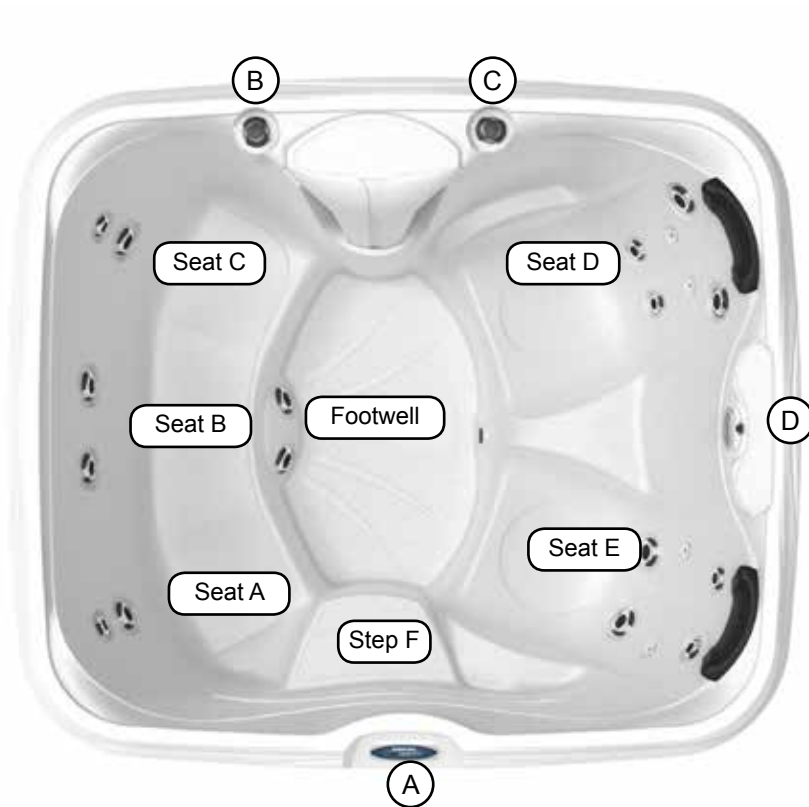

- (A) Topside Control - Activate Jets Pump, Light and Control Water Temperature
- (B) Air Control - Activates Seat A Jets (1 DirectionalMax1 Jet, 1 DirectionalMax2 Jet), Seat B Jets (2 DirectionalMax1 Jets), Seat C Jets (1 DirectionalMax1 Jet, 1 DirectionalMax2 Jet), Footwell Jets (2 DirectionalMax2 Jets)
- (C) Air Control - Activates Seat D Jets (2 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets), Seat E Jets (2 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets)
- (D) Water Feature Control - Controls Water Feature Output.
 - Jet Pump 1: All seats and footwell jets

20 Total Jets

DirectionalMax1
Jets (10)

DirectionalMax2
Jets (6)

DirectMiniMax
Jets (4)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 26.50" (67.31 cm)
- B = 26.25" (66.68 cm)
- C = 26.50" (67.31 cm)
- D = 26.25" (66.68 cm)
- E = 28.30" (71.87 cm)
- F = 18.00" (45.72 cm)
- G = 30.50" (77.47 cm)



Listed dimensions represent distance from top of spa to lowest point in seat.
Tolerance: $\pm 0.5"$ (1.27 cm)





Dimensions/Specifications Subject To Change Without Notice

Sundance Splash Paisley

Portable Dimensions

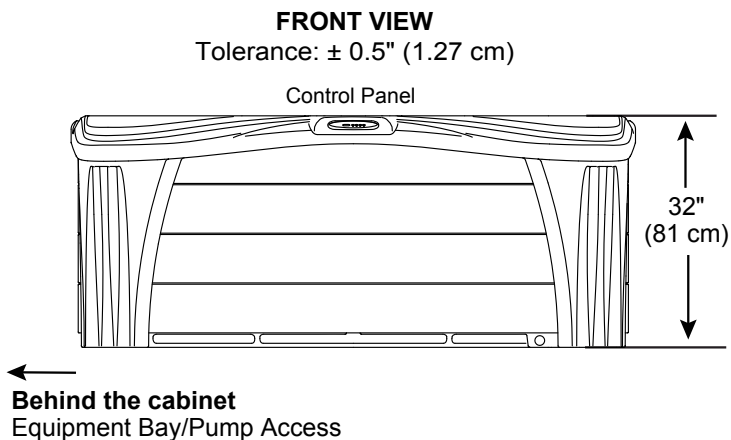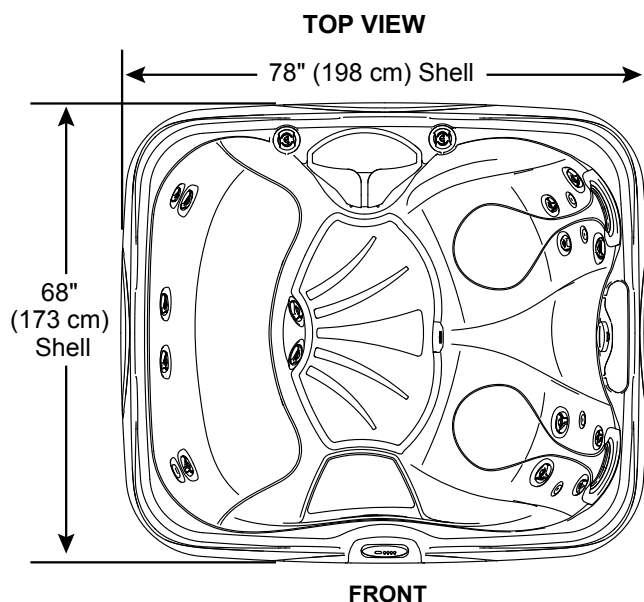

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

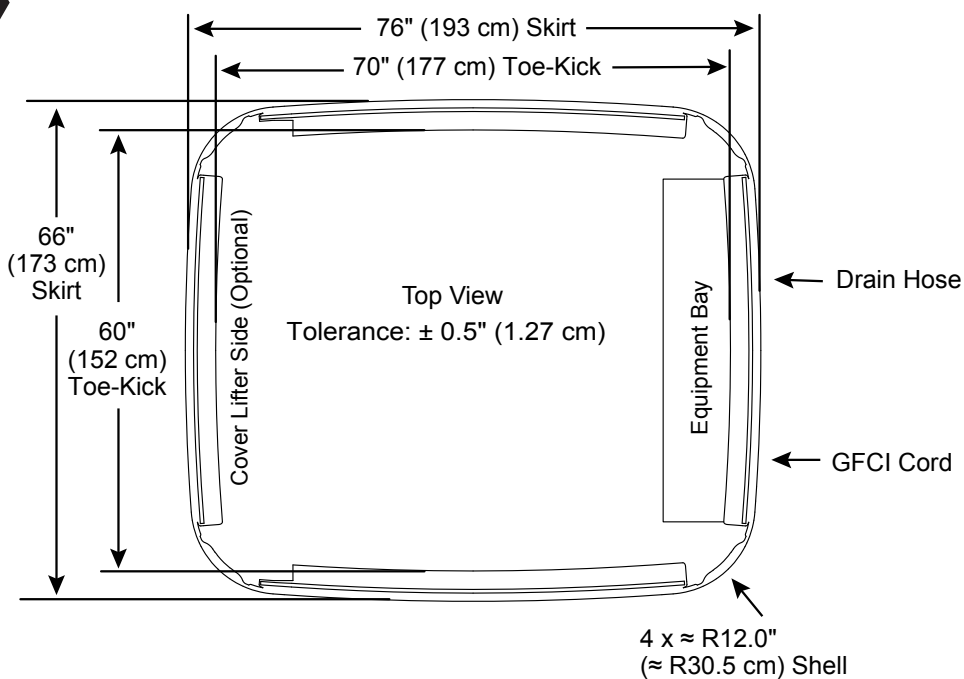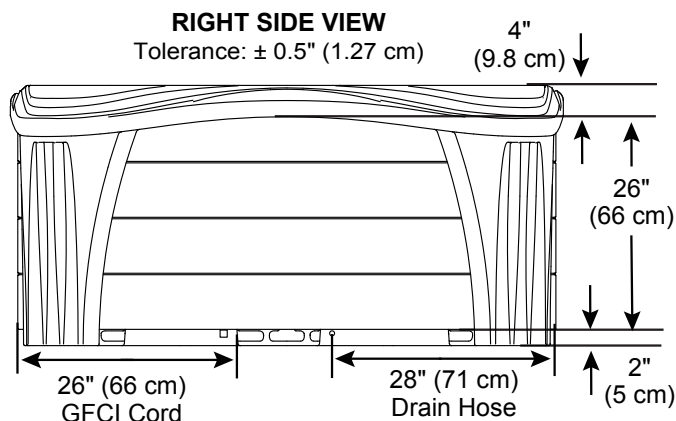

Dimensions/Specifications Subject To Change Without Notice

Sundance® Spas

Sundance Spas, Inc.

14525 Monte Vista Ave, Chino CA 91710/U.S.A.; Phone (909) 606-7733, Fax: (800) 497-7727
Website: <http://www.sundancespas.com>